

PHOTOVOLTAIC MODULE

e.Classic M

60 MONOCRISTALLINE CELLS



**HIGHEST
EFFICIENCY
UP TO 320 Wp**



**HIGHLY EFFICIENT
12-BUSBAR-
TECHNOLOGY**



**CLIMATE NEUTRAL
MANUFACTURED IN
EUROPE / AUSTRIA**



www.energetica-pv.com



#BePartOfTheChange

energetica
PHOTOVOLTAIC INDUSTRIES




e.Classic M

Long-term performer with classic elegance.

Performance and aesthetics - not a contradiction but a challenge. Developed especially for homeowners, the e.Classic M blends elegantly into the environment and enhances every home. 60 monocrystalline cells, 3.2 mm glass; the frame made of elegant, black aluminum – additionally equipped with a radiation-enhancing backsheet. With up to 320 Wp, e.Classic M achieves the highest performance and stability in its class. Plus the standard Energetica features: max. energy yield through the patented e.ISP technology, low weight and long durability. The robust stacking and packaging system e.STAK from Energetica also guarantees that the modules arrive at their destination stably and without micro-cracks.

Innovation. Power. Sustainability. And that for about 25 years.

Energetica Photovoltaic Industries GmbH is an independent, Austrian photovoltaic technology company with headquarter and production facility in Liebenfels / Austria. The sustainable supply of renewable energy has been our goal for around 25 years. The focus is on our climate-neutral product portfolio, which is developed, tested and produced in one of the world's most modern 4.0 production facilities.

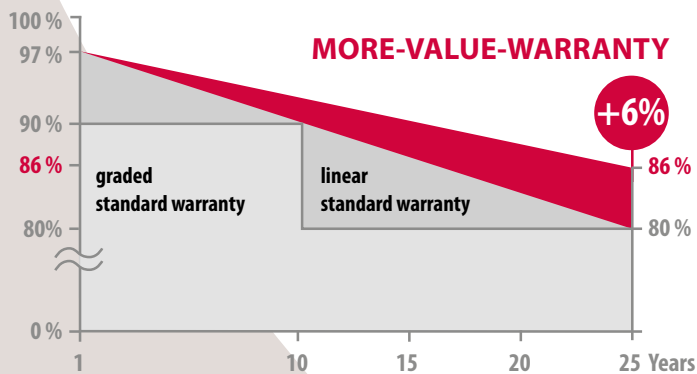

1) For details of the performance guarantee (added value guarantee), see Energetica Approved Warranty in the first year 97 percent of the nominal output and min. 86 percent of the nominal power in the 25th year.

Guarantees more performance.


What makes a top-class PV module? Top performance? Longest lifespan? Sure, but we want more:

- e** **Avoiding hot spots** through highly efficient control electronics,
- e** **more power** through 12-busbar technology,
- e** **higher yield** through anti-reflective glass technology.

Our patented e.ISP® technology increases the energy yield compared to conventional modules and protects the cell strings by more precise shutdown in the event of shading. That is why we offer a linear added value guarantee¹⁾ of 86 percent of the initial performance even after 25 years without hesitation.

Pioneering technologies.

The 12-busbar technology is used in the new e.Basic series. The energy generated is dissipated over 12 wafer-thin wires, instead of over wide collecting bars as before. This enables optimized shading management and the conservation of resources in cell production. Result: the cell surface is used more effectively and the energy yield increases with the same module size. In addition, the e.ISP® technology ensures better efficiency and optimized energy yield in the sun and in the event of shading.

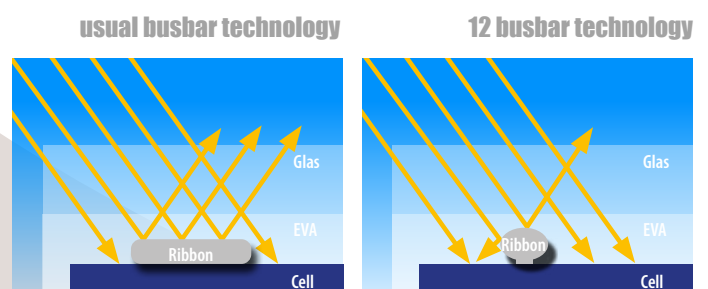

WE PAY ATTENTION TO DETAIL



e.ISP TECHNOLOGY®

Integrated Shadow Protection (e.ISP) for improved efficiency and optimized energy yield in sun and shade.

12BB TECHNOLOGY

For optimized shading, maximum efficiency and improved reliability due to shorter electron paths.

CERTIFICATE OF PERFORMANCE

Certificate of weather resistance with QR code and barcode showing measured output, serial number and module type.

60 MONOCRISTALLINE CELLS

e.Classic M



TOP QUALITY FROM THE HEART OF EUROPE

Energetica modules are developed and produced exclusively in Austria – Europe. Manufactured using patented processes, they are then tested by independent institutes.



12 YEAR WARRANTY ON OUR PRODUCTS

The Energetica Approved Warranty includes a 12-year warranty on function, material and workmanship as well as an extended performance guarantee of 86 percent - even after 25 years.



REDUCED WEAR

Energetica products are tested far harder than the IEC and UL standards require. Based on this, the annual degradation could be reduced by 10 percent.



MAXIMUM PERFORMANCE ON SUNNY DAYS

Thanks to the improved temperature coefficient, Energetica modules can produce more energy on hot, sunny days.



HIGH PERFORMANCE EVEN ON CLOUDY DAYS

Thanks to the excellent low-light behavior, Energetica modules enable high energy yields even in cloudy conditions.



INTEGRATED SHADOW MANAGEMENT (e.ISP® TECHNOLOGY)

The integrated deactivation of the cell strings in the event of shading is only available in Energetica modules. The active electronics integrated in the laminate guarantee a higher output than conventional modules in both sun and shade.



CLIMATE NEUTRAL PRODUCTION

Sustainability is a central corporate goal of Energetica. We therefore avoid CO₂ emissions in all areas. This includes the use of 100% clean energy in our production facilities as well as a fully electric fleet for sales and technology.



LIGHT AND HANDY

Weight optimization of the components reduce transport and assembly costs - much to the delight of logisticians and fitters.



TESTED AGAINST CHEMICAL INFLUENCES

Energetica modules are tested against chemical influences such as ammonia and salt spray. They are also ideal for agricultural areas and plants near the sea.

Note: This data sheet is a legally binding document and, in addition to the assembly instructions, is part of the proper documentation in accordance with OVE EN 50380. Due to constant technical innovations, R&D and improvements, the above-mentioned technical data may change accordingly. Energetica has the sole right to make these changes at any time without notice. The data given is without guarantee. Product representations are symbolic images and may differ in appearance and specified data from the original.



Electrical Data (STC)

Type	310	315	320
Maximum Power (P_{Max})	310 Wp	315 Wp	320 Wp
Open circuit voltage (V_{OC})	40,30 V	40,50 V	40,66 V
MPP Voltage (V_{MPP})	32,86 V	33,15 V	33,36 V
MPP Current (I_{MPP})	9,45 A	9,50 A	9,60 A
Short Circuit Current (I_{SC})	10,08 A	10,34 A	10,17 A
Module efficiency (η_{Modul})	19,10 %	19,40 %	19,70 %
Performance sorting	-0/+5 Wp	-0/+5 Wp	-0/+5 Wp

This measurements are valid on standard test conditions STC. All electrical data $\pm 10\%$. Measurement uncertainty P_{MPP} (P_{Max}): +/- 3%, (Airmass AM 1,5; radiation of 1000W/m2; cell temperature 25°C)

Electrical Data (NMOT)

Type	310	315	320
Maximum Power (P_{Max})	229 Wp	232 Wp	236 Wp
MPP Voltage (V_{MPP})	30,41 V	30,68 V	30,87 V
MPP Current (I_{MPP})	7,53 A	7,57 A	7,65 A
Open circuit voltage (V_{OC})	37,21 V	37,40 V	37,55 V
Short Circuit Current (I_{SC})	8,15 A	8,35 A	8,22 A

NMOT (Nominal Module Operating Temperature): Irradiance 800 W/m2, ambient temperature 20 °C, wind speed 1 m/s


Permissible operating conditions

Temperature range	-40°C bis +90°C
Maximum system voltage	1.050 V, 1.500 V on request
Test load I_{max}	examined according to IEC up to 5.4 kPa snow/2.4 kPa wind
breaking load	>6.0 kPa
Hail security	hailstone up to 25 mm \varnothing at 165,6 km/h v hailstone up to 55 mm \varnothing at 120,6 km/h v
Reverse current strength	16 A*

*In any case, due to the integrated active electronics, it must be ensured that there are no reverse currents greater than 16 A.

Temperature coefficient (T_c)

T_c short circuit current	0,04 %/K
T_c open circuit voltage	-0,27 %/K
T_c maximum power	-0,34 %/K
NOCT	42°C +/- 2

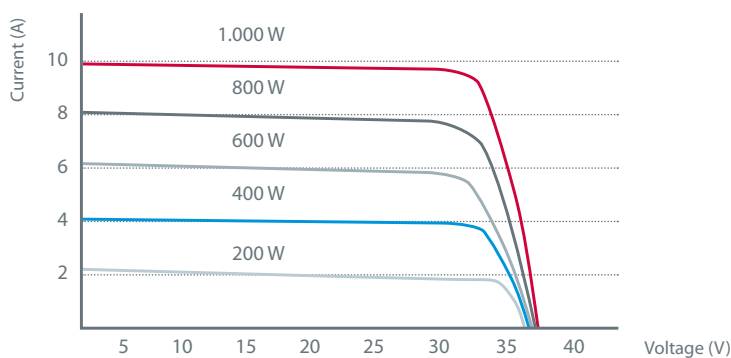

Your Specialist Partner::

Energetica Industries GmbH
Energieplatz 1 · A-9556 Liebenfels
Fon: +43 (0)4215 93 056 · Fax +43 (0)4215 93 056-222
office@energetica-pv.com · www.energetica-pv.com


Certifications and Warranties

Certifications	IEC 61215, IEC 61730-1/-2 IEC 62716 (Ammonia corrosion test) IEC 61701 (Salt mist corrosion test) ISO 9001, ISO 14001, OSHS 18001 Safety Class II
Module Fire Performance	Class C, Fire Class 1 (Italy)
Product Warranty	12 years
Output Warranty of P_{MAX} (Measurement Tolerance +/- 3%)	25 years linear acc. warranty conditions

Mechanical Data

Dimensions HxWxD	1640 x 990 x 36 mm
Weight	18 kg
Front cover	3,2 mm highly transparent tempered glass
Backsheet	co-extruded Polypropylen (PP)
Frame	black anodized aluminum
Cells	6 x 10 High efficiency solar cells (156,75 x 156,75 mm)
Cell type	monocrystalline, 12 Busbars
Bypass control	active electronics at string level
Module connection	4/6mm ² solar cable, (+,-) 1000 mm
Connectors	Multi-Contact MC4, IP68
Origin	Made in Austria

All indicated dimensions in mm

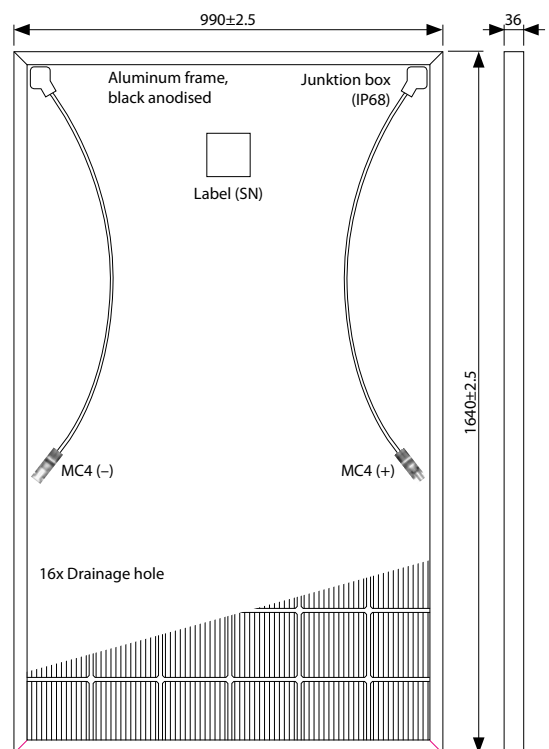

Energetica is certified according to the valid standards of ISO 9001, ISO 14001 and BS OHSAS 18001. Energetica is cooperation partner of the AIT (Austrian Institute of Technology).

All data in this data sheet comply with DIN EN 50380.

Energetica reserves the right to make production-related changes to this data sheet. The given data are without guarantee.

Dokument: 20200603_e-Classic_M